

263±0.3 (10.362in)
 251.6
 250 (VIEWING AREA) (9.850in)
 24.7 (ACTIVE AREA) (9.732in)
 133 (ACTIVE AREA CENTER) (5.240in)

(INSULATION AREA) (0.283in) 7.2 (0.283in)
 8 (0.315in)
 9.5 (0.374in)

(97.38) (3.837in)
 6.25±0.2 (0.246in)

80±1 (3.152in)
 2-R2
 4-R1
 (0.173in) 4.39
 9.4 (0.370in)

(0.246in) 6.25±0.2
 3.75 (0.148in)
 1.25 (0.049in)
 0.7 (0.028in)


SECTION A

TRACE EXPOSE (0.197in)
 5
 REINFORCEMENT FILM
 TAIL
 LOT LABEL
 STIFFENER
 0.3±0.05 (0.012in)
 (10) (0.394in)

ITO FILM (ANTI-GLARE)
 PROTECTION TAPE
 ITO GLASS

PART No.
 AST-121B

4.2 (0.165in) (INSULATION AREA)
 5.75 (0.226in) (INSULATION AREA)
 189.5
 188.5 (VIEWING AREA) (7.427in)
 185.5 (ACTIVE AREA) (7.309in)
 100.5 (ACTIVE AREA CENTER) (3.960in)
 AIR VENT (2) (0.079in)
 (5.75) (0.227in)
 (0.305in) 7.75
 (0.246in) 6.25
 (0.226in) 5.75 (INSULATION AREA)

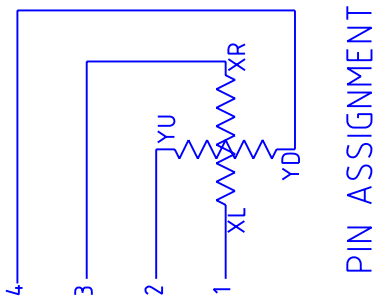

PART No.	DATE
AST-121B080A	February 8, 2007
TYPE	
STANDARD TOUCHSCREEN	
DIMENSIONAL DRAWING	
DMC Co., Ltd.	

TOLERANCE=± 0.5mm(0.02in)
 EXCEPT WHERE INDICATED
 UNIT=mm(inch)