



CN1 PinOut		CN2 PinOut	
1	Dummy	1	Dummy
2	X43	2	X77
3	X42	3	X76
4	X41	4	X75
5	X40	5	X74
6	X39	6	X73
7	X38	7	X72
8	X37	8	X71
9	X36	9	X70
10	X35	10	X69
11	X34	11	X68
12	X33	12	X67
13	X32	13	X66
14	X31	14	X65
15	X30	15	X64
16	X29	16	X63
17	X28	17	X62
18	X27	18	X61
19	X26	19	X60
20	X25	20	X59
21	X24	21	X58
22	X23	22	X57
23	X22	23	X56
24	X21	24	X55
25	X20	25	X54
26	X19	26	X53
27	X18	27	X52
28	X17	28	X51
29	X16	29	X50
30	X15	30	X49
31	X14	31	X48
32	X13	32	X47
33	X12	33	X46
34	X11	34	X45
35	X10	35	X44
36	X09	36	X43
37	X08	37	X42
38	X07	38	X41
39	X06	39	X40
40	X05	40	X39
41	X04	41	X38
42	X03	42	X37
43	X02	43	X36
44	X01	44	X35
45	X00	45	X34
46	Dummy	46	X33
47	NC	47	X32
48	NC	48	X31
49	NC	49	X30
50	NC	50	X29
51	NC	51	X28
52	NC	52	X27
53	NC	53	X26
54	NC	54	X25
55	NC	55	X24
		56	X23
		57	X22
		58	X21
		59	X20
		60	X19
		61	X18
		62	X17
		63	X16
		64	X15
		65	X14
		66	X13
		67	X12
		68	X11
		69	X10
		70	X09
		71	X08
		72	X07
		73	X06
		74	X05
		75	X04
		76	X03
		77	X02
		78	X01
		79	X00
		80	Dummy

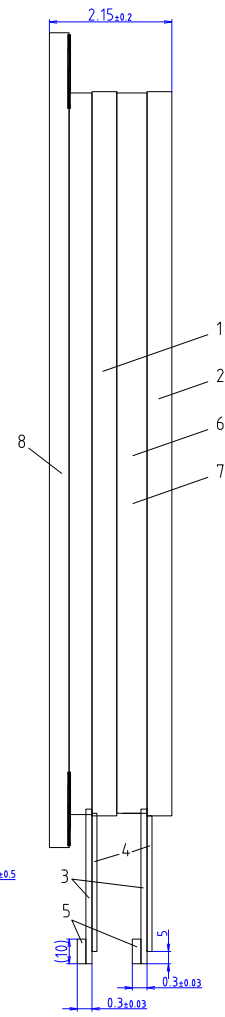

REMARKS	
FPC PATTERN PITCH	0.5mm
FPC PATTERN WIDTH	Cu 0.2-0.3mm
(CIRCUIT PATTERN WIDTH)	Ag 0.1mm
Ø TOLERANCE	±0.3mm

ITEM	MATERIAL	REMARKS
1 TOP ITO FILM	±0.1mm	
2 BOTTOM ITO FILM	±0.1mm	
3 FPC	POLYIMIDE 12.5μm	Technique copper foil (4mm)
4 REINFORCEMENT FILM	POLYIMIDE 25μm	
5 STIFFENER	POLYIMIDE 225μm	
6 ADHESIVE SHEET	OCA 50μm	
7 ADHESIVE SHEET A	OCA 100μm	
8 COVER GLASS	1±1.8mm	Clear/Chemical strengthening Black printing



TOLERANCE=±0.3mm
EXCEPT WHERE INDICATED
UNIT=mm

PART No.	DATE
DUS-F215WA060A2A	Jan/25/2021
TYPE	DMC Co., Ltd.
Projected Capacitive DIMENSIONAL DRAWING	

